TECHNICAL DATA

Orderman Columbus700 & Columbus300

DISPLAY: Philips 15" LCD TFT Panel 300 cd
Resolution: 1024x768

TOUCH: ELO 5 wire resistive touch screen, 4H hardness

FEATURES
RFID: Ordercard functionality inclusive
Optional: 2in1 waiter lock (Addimat & Dallas)
Optional: MSR (3 Track, encrypted)
Optional: Customer display (VFD 2x20)

OPERATING SYTEMS
Microsoft® POSReady2009
Microsoft® Windows® 7 Professional (and others)

STANDARDS

Operating Temperature:	0°C – 40°C
Storage Temperature:	-20°C – 60°C
Humidity:	5 to 85% non-condensing
Shock and Vibration:	IEC68

Packaged Shock 6 Vibration (shipping): ISTA standards

CERTIFICATIONS
EMI Certifications CE (EN55022 and EN55024)
Safety Certifications CE (EN60950)
RoHS and WEEE compliant

Orderman Columbus700

CPU
Intel® Dual Core 1.1 GHz ULV 18W, 32nm
(2M Cache, 1.07 GHz)

CHIPSET:
Mobile Intel® HM55 Express Chipset

PORTS AND EXPANSIONS
6 Powered Serial (5V/12V)
6 USB 2.0 (5V)
1 Ethernet
1 Cash Drawer (24V)
1 DVI
1 Orderman network (12V)
1 Router light (optional) (12V)
1 uSSD (optinal)

MEMORY
Solid State Disk (pSSD)
Internal memory: DDR3 SODIMM up to 4 GB

WEIGHT: 7,95 kg

INCLUDED IN DELIVERY (STANDARD)
1x Columbus700 Terminal
incl. 1 GB DDR3, 8GB SSD, Care2
1x 24V, 6.25A Power Supply
1x Power Cord
1x Quick Reference Guide

Orderman Columbus300

CPU
Intel® Atom™ Processor N270
(512K Cache, 1.60 GHz, 533 MHz FSB)

CHIPSET
Mobile Intel® 945GSE Express Chipset

PORTS AND EXPANSIONS
4 Powered Serial (5V/12V)
4 USB 2.0 (5V)
1 Ethernet
1 Cash Drawer (24V)
1 DVI
-
-
-

MEMORY
Solid State Disk (pSSD)
Internal memory: DDR2 SODIMM up to 2 GB

WEIGHT: 7,15 kg

INCLUDED IN DELIVERY (STANDARD)
1x Columbus300 Terminal
incl. 1 GB DDR2, 8GB SSD, Care2
1x 19V, 4.74A Power Supply
1x Power Cord
1x Quick Reference Guide

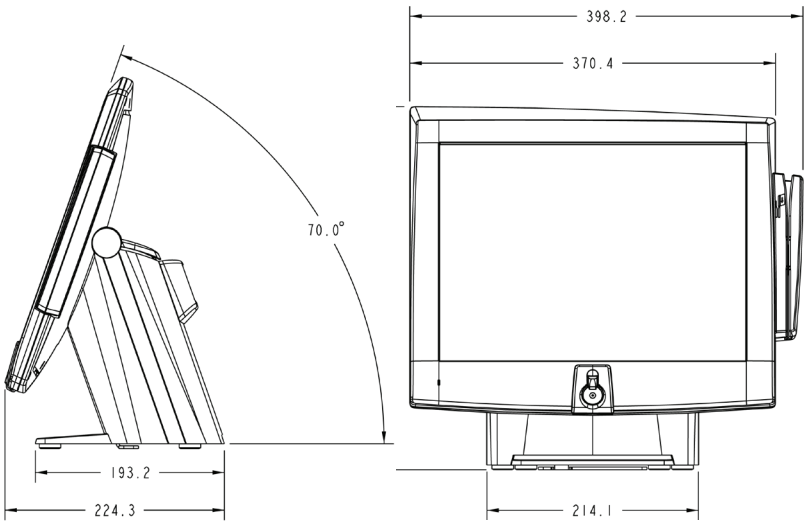

Orderman GmbH
Bachstraße 59
5020 Salzburg, Austria
Tel: +43 662 65 05 61 - 0
E-Mail: office@orderman.com

ORDERMAN®
get more.